

Faunus 99



LF230 DK

Faunus 149



LF232 DK

Recess


UK Ledfixx fixtures made of aluminum, have the CLT label that guarantees the luminous flux, light color and lifespan.

NL Ledfixx armaturen uit aluminium, voorzien van het CLT label dat garant staat voor behoud van lichtstroom, lichtkleur en levensduur.

D Ledfixx leuchten aus alu. Design-kühlkörper mit CLT label. Dadurch wird der lichtstrom, Lichtfarbe, und die Lebensdauer garantiert.


Design: Egbert Keen

Tellus 64




LF246 DK

Minos 79



LF236 DK

Minos 99



LF238 DK

Type nr.		Citizen LED	
Photometric		Beam angle	
Type	code		Data
LF230 DK	C4130	20°	X-12
	C4230	32°	
	C4330	43°	


Type nr.		Xicato LED	
Photometric		Beam angle	
Type	code		Data
LF232 DK	XC 30	41°	X-03
	XD 30	56°	

Type nr.		Citizen LED	
Photometric		Beam angle	
Type	code		Data
LF246 DK	C4430	25°	C-01
	C4530	36°	
	C4630	50°	

Type nr.		Xicato LED	
Photometric		Beam angle	
Type	code		Data
LF236 DK	XA 30	21°	X-02
	XB30	59°	


Type nr.		Xicato LED	
Photometric		Beam angle	
Type	code	angle	Data
LF238 DK	XC 30	21°	X-03
	XD30	59°	

Faunus 99




LF 230 DK
ø 137 mm H 65 mm

Faunus 149




LF 232 DK
ø 187 mm H 86 mm

Tellus 64




LF 246 DK
ø 137 mm H 68 mm

Minos 79



LF236 DK
ø 137 mm H 77 mm

Minos 99



LF238 DK
ø 187 mm H 88 mm

75

DATA Matrix


Code	mA	Lm	Lm/W	Vf	W	K	CRI
C-01	500	524	110	9,5	4,7	3000	85
X-02	350	720	129	17,6	5,6	3000	85
	500	965	119	18,0	8,1	3000	85
	700	1300	111	18,4	11,7	3000	85
X-03	350	1105	119	29,3	9,3	3000	85
	500	1490	110	30,0	13,6	3000	85
	700	2000	103	30,7	19,5	3000	85
X-12	350	1680	139	34,5	12,1	3000	85
	500	2331	131	35,5	17,7	3000	85

Drivers

pag. 86-89


RAL 9018	
RAL 6034	
RAL 7037	
Special	RAL

ledfixx

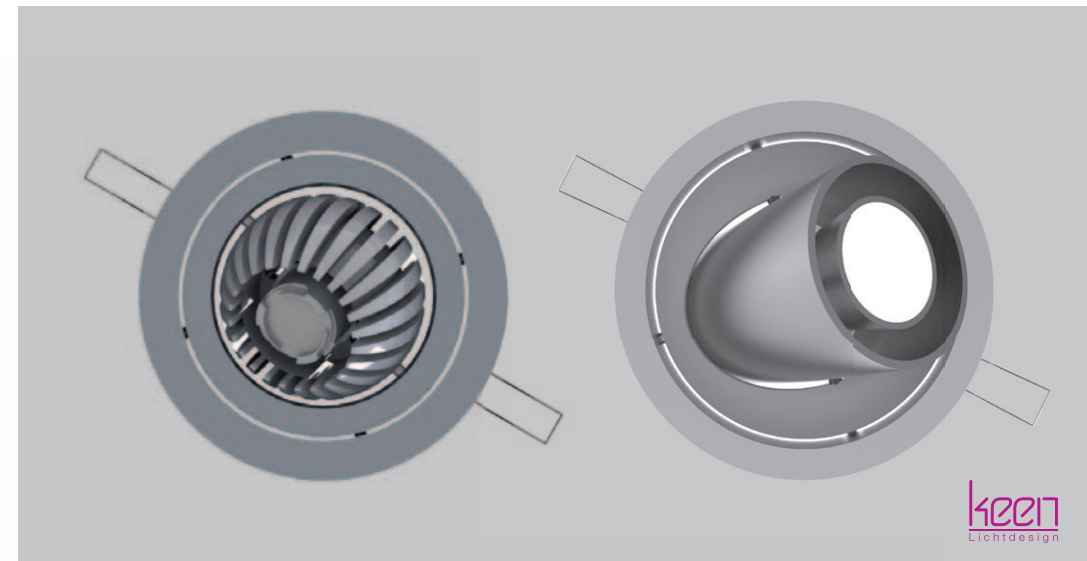


keen
Lichtdesign

Latinus 159

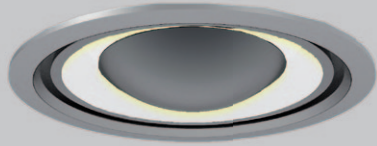

LF234 RF

Latinus 159



LF 234 RF
ø 187 mm H 60 mm

Type nr.		Citizen LED	
Photometric		Beam angle	
Type	code		Data
LF234 RF	XE0000	114°	X-02

Recess

UK Ledfixx fixtures made of aluminum, have the CLT label that guarantees the luminous flux, light color and lifespan.

NL Ledfixx armaturen uit aluminium, voorzien van het CLT label dat garant staat voor behoud van lichtstroom, lichtkleur en levensduur.

D Ledfixx leuchten aus alu. Design-kühlkörper mit CLT label. Dadurch wird der lichtstrom, Lichtfarbe, und die Lebensdauer garantiert.

Design: Egbert Keen

Drivers

pag. 86-89

RAL 9018	
RAL 6034	
RAL 7037	
Special	RAL

ledfixx


Tellus 64



LF246 RF

Type nr.		Citizen LED	
Photometric		Beam angle	
Type	code		Data
LF246 RF	C4130	20°	C-01
	C4230	32°	
	C4330	43°	

Tellus 64



LF 246 RF
ø 65 mm H 75 mm


Tellus 79



LF248 RF

Type nr.		Xicato LED	
Photometric		Beam angle	
Type	code		Data
LF248 RF	XA 30	41°	X-02
	XB 30	56°	

Tellus 79



LF 248 RF
ø 80 mm H 75 mm


Minos 99



LF238 RF

Type nr.		Xicato LED	
Photometric		Beam angle	
Type	code		Data
LF238 RF	XE 30	21°	X-03
	XC30	40°	
	XD30	59°	

Minos 99



LF 238 RF
ø 100 mm H 75 mm

DATA Matrix

Code	mA	Lm	Lm/W	Vf	W	K	CRI
C-01	500	524	110	9,5	4,7	3000	85
X-02	350	720	129	17,6	5,6	3000	85
	500	965	119	18,0	8,1	3000	85
	700	1300	111	18,4	11,7	3000	85
X-03	350	1105	119	29,3	9,3	3000	85
	500	1490	110	30,0	13,6	3000	85
	700	2000	103	30,7	19,5	3000	85